

# HYDROBURN®

## Gasoline Treatment

FOR USE WITH UNDERGROUND & ABOVE  
GROUND TANKS, ENGINES & EQUIPMENT




### ***Eliminate Water in Gasoline & Ethanol Blends!***

Water, the worst contaminate in all fuels, builds up in every fuel tank every day through condensation. Water reduces the heat of combustion which means more smoke, less power, hard starting, rough idle, poor mileage, winter freeze-ups and microbe growth. Hydroburn treatments, which are complex organic compounds, have a strong attraction to water. Hydroburn seeks out water droplets, breaks the bond between adjacent water molecules, and bonds itself to the individual molecule. The water and Hydroburn molecules become a combustible compound that liberates the water molecule as steam in the exhaust. When the fuel is agitated the combustible compounded water molecules are dispersed throughout the entire fuel tank as an emulsion. Over time the water is removed as the engine runs, "burning" it off.

- **Hydroburn®** eliminates water and water-related problems when applied correctly!! Period.
- **Hydroburn®** prevents and **REVERSES PHASE SEPARATION** (Patent Pending) in E-10 Fuel...See how it works!  
<http://www.youtube.com/watch?v=XIjQdR-avdM>
- **Hydroburn®** improves fuel quality and promotes more complete combustion.

*HYDROBURN fuel treatment is scientifically formulated to break the weak hydrogen bond between water molecules...and then becomes a combustible compound that liberates the water molecule as steam in the exhaust.*

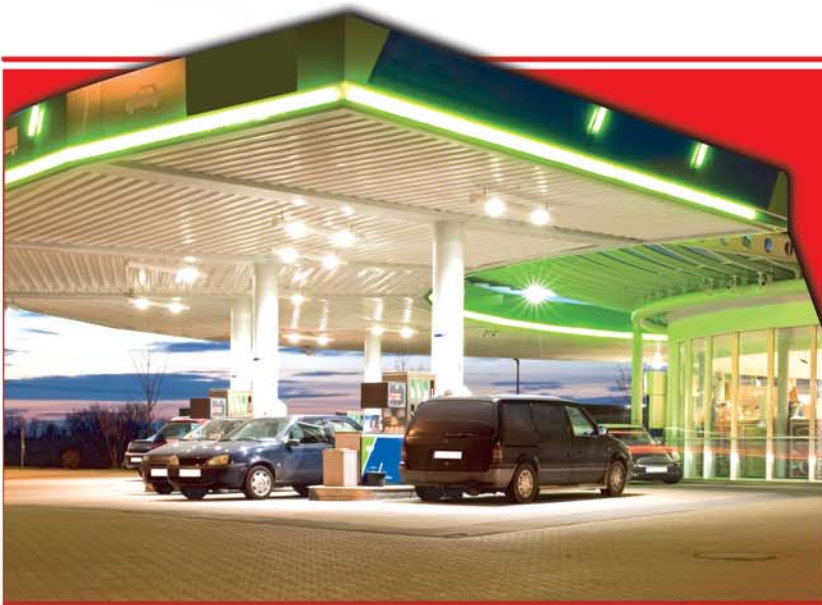

**REVERSE  
PHASE SEPARATION  
IN ETHANOL BLENDED FUEL**  
(Patent Pending)

- **Hydroburn®** restores phase separated fuel to previous ethanol amount & octane rating
- We guarantee **Hydroburn®** to be compatible with all **Cim-Tek®** filters.  
(We cannot guarantee compatibility with other brands of filters.)

**CALL NOW! 1-888-898-7187 | WWW.CIM-TEK.COM**



# HYDROBURN®

## Gasoline Treatment

FOR USE WITH UNDERGROUND & ABOVE  
GROUND TANKS, ENGINES & EQUIPMENT

### Gasoline and Ethanol Blend Fuel Treatment

Part No.	Description	Ctn. Wt.
60061	Hydroburn Gasoline Fuel Treatment, 8 Ounce Bottles, 12 per carton	7.5#
60062	Hydroburn Gasoline Fuel Treatment, 32 Ounce Bottles, 12 per carton	25#
60063	Hydroburn Gasoline Fuel Treatment, 5 Gallon Pail	42#
60064	Hydroburn Gasoline Fuel Treatment, 55 Gallon Drum	456#

### Pallet Quantities

**8 oz. bottles**, 12 per case, 140 cases per pallet = 1680 each per pallet

**32 oz. bottles**, 12 per case, 60 cases per pallet = 720 per pallet

**5 gallon pails** = 36 per pallet

**55 gallon drums** = 4 per pallet

### Gasoline Treatment Dosing Ratio

Maintenance Dose: 1 gallon per 300 gallons of fuel. Treat known water content 1:1. That is for each part water add one part Hydroburn. Hydroburn forms a combustible compound that liberates the water molecule as steam in the exhaust.

**8 oz. bottle** treats 20 gallons

**32 oz. bottle** treats 80 gallons

**5 gallon pail** treats 1,600 gallons

**55 gallon drum** treats 16,000 gallons

### Reverse Phase Separation (Patent Pending)

1. Determine the volume of phase separated fluid.
2. Add three times that volume of Hydroburn®.
3. Agitate.
4. **See how it works!** <http://www.youtube.com/user/CimTek2009>

### FOR USE IN ALL GASOLINE FUELS, ENGINES & EQUIPMENT - ALL YEAR!

*Bio-based formula promotes more complete combustion for reduced emissions, better mileage, easier starts, smoother idle, more power & faster acceleration.*

### KEEP OUT OF REACH OF CHILDREN.

**CAUTION: HAZARDOUS, FLAMMABLE LIQUID.** Harmful or fatal if swallowed. Avoid contact with eyes or prolonged contact to skin. If swallowed call physician immediately. Avoid spillage on painted surfaces. KEEP LID TIGHTLY CLOSED.

**CALL NOW! 1-888-898-7187 | WWW.CIM-TEK.COM**

Manufactured For: Central Illinois Manufacturing Company, Bement, IL 61813

